




QP - 342WMSWH

Single port surface mounted box

Single port surface mounted box

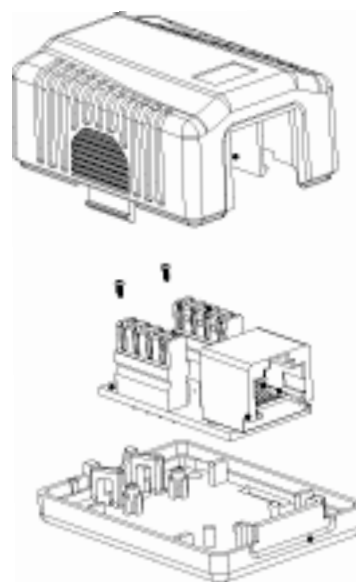

Specifications

Material

Case: ABS, UL 94V – 0

RJ45 Jack Housing: PBT + Glass –fiber, UL 94-v – 0, **Black color.**

Contact Bracket: PBT + Glass Fiber, UL 94V – 0, **Black color.**

RJ45 Jack contact:

Material: Phosphor Bronze with Nickel plated.

Finish: 50 micro-inch Gold plated on Plug contact area.

IDC:

IDC Housing: PC + Glass Fiber, UL 94V – 2.

IDC Terminal: Phosphor Bronze with Tin plated.

Screw: M2.0 x 6.0 x ø3.3mm.

PCB: Fr4, UL 94 – 0

Screw: M3.5 x 16.0 x ø6.0mm.

Performance

T568A & T568B wiring printing on IDC.

Insertion force: 200 max. (IEC 60603 – 7 – 4).

Retention strength: 7.7 kg between Jack and Plug.

Operating temperature: -10°C to 60°C (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)

Life (mating cycles):

Jack: 750 cycles min. (ISO/IEC 60603 – 7 – 4).

IDC: Suitable for 22 – 26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.

The Cat.5E transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard adapter.

Certificates

FCC CE RoHS

