




Double port surface mounted box

### QP - 342WMDWH

Double port surface mounted box

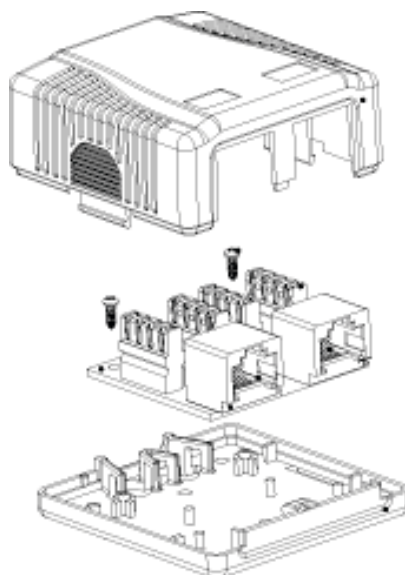

## Specifications

### Material

**Case:** ABS, UL 94V – 0

**RJ45 Jack Housing:** PBT + Glass –fiber, UL 94-v – 0, **Black color.**

**Contact Bracket:** PBT + Glass Fiber, UL 94V – 0, **Black color.**

### RJ45 Jack contact:

Material: Phosphor Bronze with Nickel plated.

Finish: 50 micro-inch Gold plated on Plug contact area.

### IDC:

IDC Housing: PC + Glass Fiber, UL 94V – 2.

IDC Terminal: Phosphor Bronze with Tin plated.

**Screw:** M2.0 x 6.0x ø6.0mm.

### Performance

T568A & T568B wiring printing on IDC.

**Insertion force:** 200 max. (IEC 60603 – 7 – 4).

**Retention strength:** 7.7 kg between Jack and Plug.

**Operating temperature:** -10°C to 60°C (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)

### Life (mating cycles):

**Jack:** 750 cycles min. (ISO/IEC 60603 – 7 – 4).

**IDC:** Suitable for 22 – 26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.

The Cat.5E transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard adapter.

### Certificates

FCC CE RoHS